

SVANEHOJ DEEPWELL CARGO PUMP

MODEL DW

Description

Lineshaft driven deepwell pump with discharge through the column.
Capacity: 50 -1100 m³/h

Benefits


Unrivalled list of references, well-proven technology, highest level of safety with back to back mechanical shaft seals, custom built for liquefied gas down to a temperature of -164°C.

Typical applications

Cargo offloading.

Standard materials



All wetted parts in AISI 304.

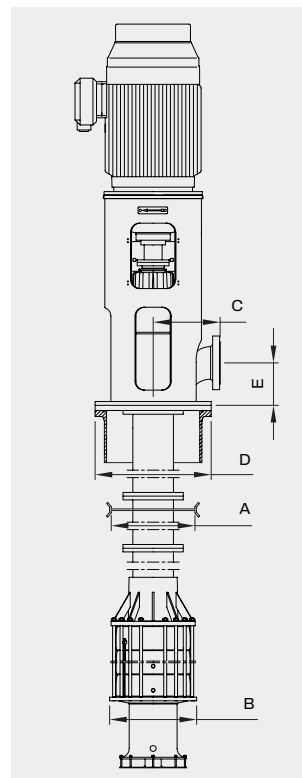


TECHNICAL SPECIFICATIONS

Pump Model Size	Discharge Flange (DN)	Dimensions (mm)					Dome flange	Weight of 6 m pump ex. Motor (kg)	Weight Pipe stack/m (kg)
		Diameter of exterior support	Diameter of pump head/cylinder	Distance from dome to centre of discharge flange	Diameter of dome	Height from dome to centre of discharge flange			
		A	B	C	D	E			
DW 80-K+I	100	480	435	355	680	180	PN2.5	912	36
						204	PN20		
DW 100-K+I	100	480	435	355	680	180	PN2.5	946	36
						204	PN20		
DW 125-K+I	100	480	480	355	680	180	PN2.5	1008	42
	150	480	480	355	680	211	PN2.5		
						235	PN20	1085	50
DW 132-K+I	100	480	480	355	680	180	PN2.5	1057	42
	150	480	480	355	680	211	PN2.5		
						235	PN20	1134	50
DW 150-K+I	100	480	480	355	680	180	PN2.5	1063	42
	150	480	480	355	680	211	PN2.5		
						235	PN20	1140	50
DW 200-K+I	200	565	565	450	780	275	PN2.5	1379	66
	250	565	565	450	780	275	PN2.5		
					850	315	PN20	1521	66
DW 250-K+I	200	620	620	450	780	275	PN2.5	1519	66
	250	620	620	450	780	275	PN2.5		
					850	315	PN20	1653	66

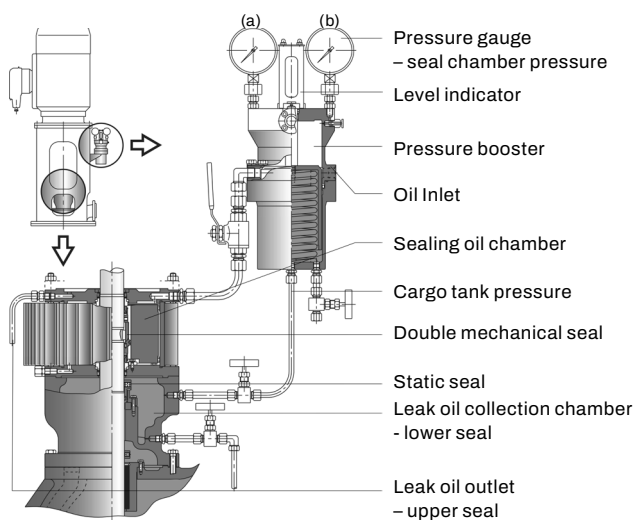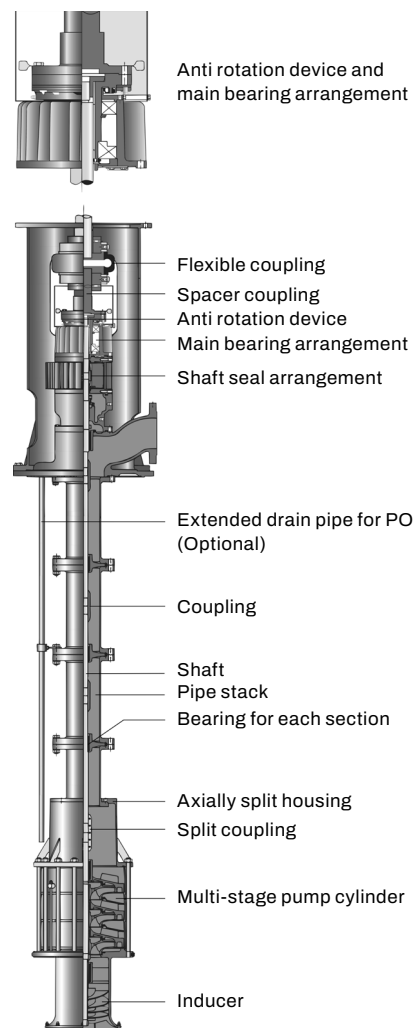

SHAFT SEALING
ARRANGEMENTSECTIONAL
DRAWING

CAPACITY RANGE

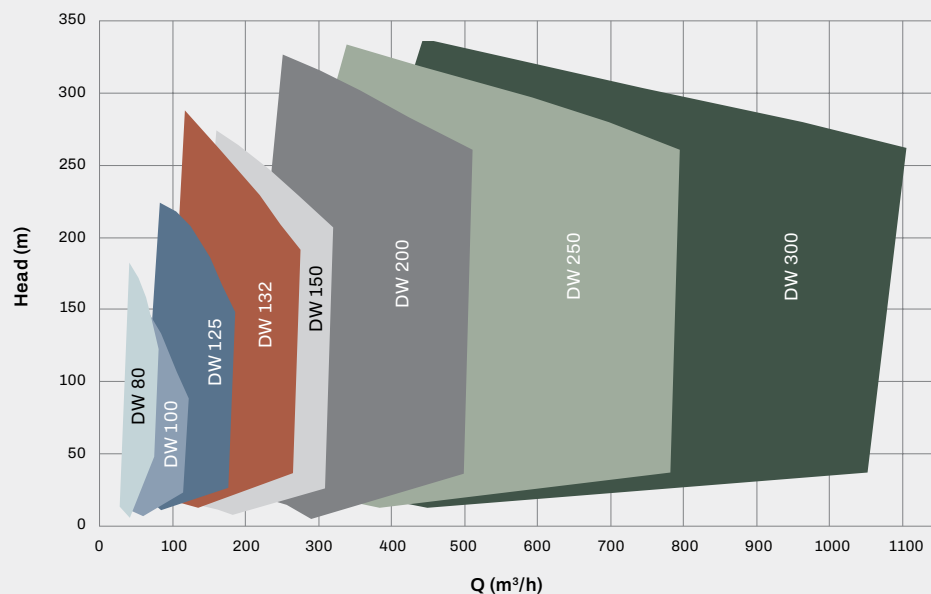

Note: Other capacities are available with variable frequency drive.



Svanehoj Danmark A/S
Fabriksparken 6,
9230 Svenstrup J

Tel.: +45 96 37 22 00
svanehoj@svanehoj.com
svanehoj.com

SVANEHOJ
An ITT Company